




SERIA 53200 (oporowe)

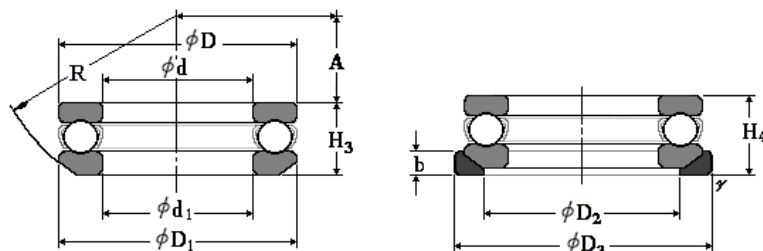


Oznaczenie łożyska		Wymiary główne (mm)									Wymiary podkładki kulistej (mm)		
Z kulistym pierścieniem zewnętrznym	Z podkładką kulistą	d	D	d ₁	D ₁	H ₃	H ₄	r _{min}	A	R	D ₂	D ₃	b
53200	53200U	10	26	12	26	11,6	13	0,6	8,5	22	18	28	3,5
53201	53201U	12	28	14	28	11,4	13	0,6	11,5	25	20	30	3,5
53202	53202U	15	32	17	32	13,3	15	0,6	12	28	24	35	4
53203	53203U	17	35	19	35	13,2	15	0,6	16	32	26	38	4
53204	53204U	20	40	22	40	14,7	17	0,6	18	36	30	42	5
53205	53205U	25	47	27	47	16,7	19	0,6	19	40	36	50	5,5
53206	53206U	30	52	32	52	17,8	20	0,6	22	45	42	55	5,5
53207	53207U	35	62	37	62	19,9	22	1	24	50	48	65	7
53208	53208U	40	68	42	68	20,3	23	1	28,5	56	55	72	7
53209	53209U	45	73	47	73	21,3	24	1	26	56	60	78	7,5
53210	53210U	50	78	52	78	23,5	26	1	32,5	64	62	82	7,5
53211	53211U	55	90	57	90	27,3	30	1	35	72	72	95	9
53212	53212U	60	95	62	95	28	31	1	32,5	72	78	100	9
53213	53213U	65	100	67	100	28,7	32	1	40	80	82	105	9
53214	53214U	70	105	72	105	28,8	32	1	38	80	88	110	9
53215	53215U	75	110	77	110	28,3	32	1	49	90	92	115	9,5
53216	53216U	80	115	82	115	29,5	33	1	46	90	98	120	10
53217	53217U	85	125	88	125	33,1	37	1	52	100	105	130	11
53218	53218U	90	135	93	135	38,5	42	1,1	45	100	110	140	13,5
53220	53220U	100	150	103	150	40,9	45	1,1	52	112	125	155	14

53222	53222U	110	160	113	160	40,2	45	1,1	65	125	135	165	14
53224	53224U	120	170	123	170	40,8	46	1,1	61	125	145	175	15
53226X	53226XU	130	187	133	190	47,9	53	1,5	67	140	160	195	17
53228X	53228XU	140	197	143	200	48,6	55	1,5	87	160	170	210	17
53230X	53230XU	150	212	153	215	53,3	60	1,5	79	160	180	225	20,5
53232X	53232XU	160	222	163	225	54,7	61	1,5	74	160	190	235	21
53234X	53234XU	170	237	173	240	58,7	65	1,5	91	180	200	250	21,5
53236X	53236XU	180	247	183	250	58,2	66	1,5	112	200	210	260	21,5
53238X	53238XU	190	267	194	270	65,7	73	2	98	200	230	280	23
53240X	53240XU	200	277	204	280	65,3	74	2	125	225	240	290	23
53244X	53244XU	220	297	224	300	65,6	75	2	118	225	260	310	25
53248X	53248XU	240	335	244	340	81,6	92	2,1	122	250	290	350	30
53252X	53252XU	260	355	264	360	82,8	93	2,1	152	280	305	370	30
53256X	53256XU	280	375	284	380	85	94	2,1	143	280	325	390	31
53260X	53260XU	300	415	304	420	100,5	112	3	164	320	360	430	34
53264X	53264XU	320	435	325	440	100,5	112	3	157	320	380	450	36
53268X	53268XU	340	455	345	460	100,3	113	3	199	360	400	470	36
53272X	53272XU	360	495	365	500	116,7	130	4	172	360	430	510	43

* - Informacje zawarte w tabeli są informacjami poglądowymi, za które firma DORMET nie odpowiada.



Wymiary zabudowy, nośność bazowa, prędkości graniczne

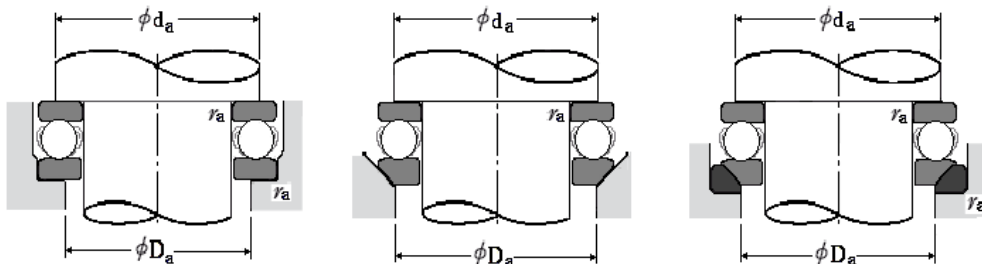

Oznaczenie łożyska		Wymiary zabudowy (mm)			Nośność bazowa				Graniczne prędkości obrotowe (min)	
					(N)		(kgf)			
Z kulistym pierścieniem zewnętrznym	Z podkładką kulistą	d _a min	D _a max	r _a max	C _a	C _{0a}	C _a	C _{0a}	Smar	Olej
53200	53200U	20	16	0,6	12800	17100	1300	1740	6000	9000
53201	53201U	22	18	0,6	13300	19000	1350	1940	5600	8500
53202	53202U	25	22	0,6	16700	24800	1710	2530	5000	7500
53203	53203U	28	24	0,6	17300	27300	1760	2780	4800	7500
53204	53204U	32	28	0,6	22500	37500	2290	3850	4300	6300
53205	53205U	38	34	0,6	28000	50500	2860	5350	3800	5600
53206	53206U	43	39	0,6	29500	58000	3000	5950	3400	5300
53207	53207U	53	46	1	39500	78000	4050	7950	3000	4500
53208	53208U	57	53	1	47500	98500	4850	10000	2800	4300
53209	53209U	62	56	1	48000	105000	4900	10700	2600	4000
53210	53210U	67	61	1	49000	111000	5000	11400	2400	3600
53211	53211U	76	69	1	70000	159000	7150	16200	2200	3200
53212	53212U	81	74	1	71500	169000	7300	17200	2000	3000
53213	53213U	86	79	1	75500	189000	7700	19200	1900	2800
53214	53214U	91	84	1	74000	189000	7550	19200	1900	2800
53215	53215U	96	89	1	78000	209000	7950	21300	1800	2800
53216	53216U	101	94	1	79000	218000	8050	22300	1800	2600
53217	53217U	109	101	1	96000	264000	9800	26900	1600	2400
53218	53218U	117	108	1	114000	310000	11600	31500	1400	2200

53220	53220U	130	120	1	135000	375000	13700	38500	1300	2000
53222	53222U	140	130	1	136000	395000	13900	40000	1300	1900
53224	53224U	150	140	1	141000	430000	14400	44000	1200	1800
53226X	53226XU	166	154	1,5	183000	550000	18700	56000	1100	1600
53228X	53228XU	176	164	1,5	186000	575000	18900	59000	1000	1500
53230X	53230XU	189	176	1,5	238000	735000	24300	75000	950	1400
53232X	53232XU	199	186	1,5	249000	805000	25400	82000	900	1400
53234X	53234XU	212	198	1,5	280000	915000	28500	93000	850	1300
53236X	53236XU	222	208	1,5	284000	955000	28900	97000	800	1200
53238X	53238XU	238	222	2	320000	1 110 000	32500	113000	750	1100
53240X	53240XU	248	232	2	315000	1 110 000	32500	113000	710	1100
53244X	53244XU	268	252	2	325000	1 210 000	33500	123000	670	1000
53248X	53248XU	299	281	2	420000	1 650 000	43000	168000	560	850
53252X	53252XU	319	301	2	435000	1 800 000	44500	184000	560	850
53256X	53256XU	339	321	2	450000	1 950 000	46000	199000	530	800
53260X	53260XU	371	349	2,5	540000	2 410 000	55000	246000	450	670
53264X	53264XU	391	369	2,5	585000	2 680 000	59500	273000	450	670
53268X	53268XU	411	389	2,5	595000	2 800 000	60500	285000	430	630
53272X	53272XU	442	418	3	705000	3 500 000	72000	355000	380	560

* - Informacje zawarte w tabeli są informacjami poglądowymi, za które firma DORMET nie odpowiada.